

# Pedal Position Sensing in Heavy-Duty Vehicles

## An Application Note

### Background

Honeywell solid-state Hall-effect Rotary Position Sensors (RTY and RTP Series) may potentially be used to replace the mechanical cable connection between the foot pedal and the engine in heavy-duty equipment and other vehicles. For example, an RTY Series sensor can be mounted adjacent to the pedal to measure how far the pedal is depressed or released by the operator (see Figure 1). The sensor senses the change in pedal position and sends a signal to the engine control unit to either increase or reduce the flow of gasoline and air across the throttle plate, as needed. This type of drive-by-wire system can be safer and more cost-effective than cable-connected systems.

### Value to Customer

#### Longer Application Life

- Rated for 35 million product cycles (RTY Series); rated for infinite rotation (RTP Series)
- Provides non-contact operation, low torque actuation and reduces worn-out mechanisms (RTP Series)

#### Wider Sensing Range


- Eight factory-set operating ranges (50°, 60°, 70°, 90°, 120°, 180°, 270° 360°) allow the customer the ability to select the range of travel needed for the application



### Enhanced Design Flexibility

- Industry-standard AMP termination with North American and European pinout styles
- IP69K rated when used with mating connector AMP Superseal 282087-1
- No rotating shaft/bearing arrangement allows performance in corrosive environmental conditions (RTP Series)
- Supply voltage options: Low voltage (LV) 5.0 Vdc or high voltage (HV) 10 Vdc to 30 Vdc

**Figure 1. RTY Series Sensor Mounted Adjacent to a Heavy Duty Equipment Pedal**

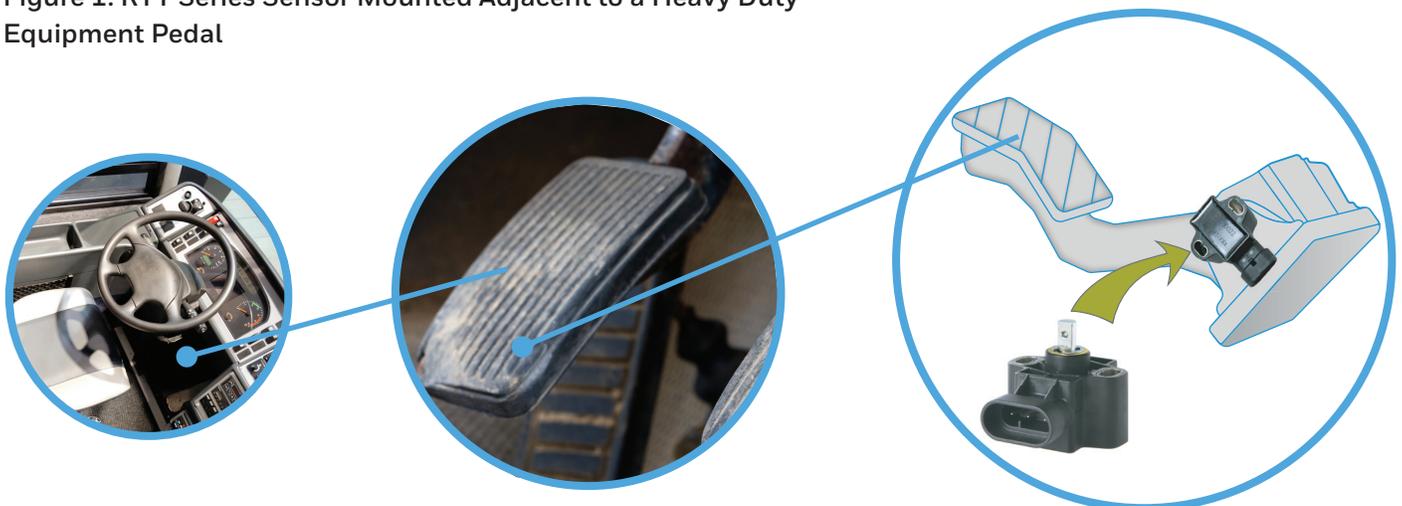

- Output voltages of 0.5 Vdc to 4.5 Vdc for the standard option, and 4.5 Vdc to 0.5 Vdc for the inverted option
- Wide operating temperature range from -40°C to 125°C [-40°F to 257°F]
- Available with or without a lever; lever may allow customers to reduce the number of mechanical linkages required for their application (RTY Series) (see Figure 2)
- Two-piece design provides more installation flexibility with reduced concern for possible side-loading (RTP Series) (see Figure 2)

### Enhanced Durability

- Long product life of 35 M cycles (RTY Series); unlimited rotation (RTP Series)
- EMI/EMC tested, integrated reverse polarity and short circuit protection against installation errors and frequencies in the installed environment
- Media-compatible with heavy-duty transportation fluids, such as diesel and gasoline fuels, engine oils and coolants
- Shock-rated to 50 G peak (RTP Series, RTY Series without lever)
- Vibration-tested to 20 G peak (RTP Series, RTY Series without lever)
- Salt fog-tested:
  - To concentration 5% ±1% for 240 hours per SAE J1455 Section 4.3.3.1 (at 5.0 Vdc, 38°C [100°F]) (RTY Series)
  - On bare magnet 96 hours per ASTM B117; housed magnet 240 hours per ASTM B117 (RTP Series)
- 2-channel output option for customers requiring redundancy in their systems (RTY Series)

### CE Approvals

### Honeywell Assurance

- Our industry-leading capabilities in research and development provide the customer with improved quality and support.

## Other Potential Applications

### Transportation

- Position and movement detection (pedals, throttles, gear shifts, levers, steering, linkages and hitches) in trucks, buses, off-road vehicles, cranes and industrial/construction/agricultural vehicles and equipment
- Suspension/kneeling position (buses, trucks)
- Tilt/trim position (boat engines, tilling equipment)

### Industrial

- HVAC damper control
- Irrigation equipment pivot control
- Valve control

**Figure 2. RTY Series and RTP Series Available Configurations**

RTY SERIES (INTEGRAL SHAFT)	RTP SERIES (SEPARATE MAGNET)	FEATURES
Without lever 	Bare magnet 	<ul style="list-style-type: none"> <li>• True, non-contact operation</li> <li>• 35 M cycle product life (RTY Series); unlimited rotation (RTP Series)</li> <li>• Solid-state Hall-effect technology</li> <li>• Rugged IP69K-sealed package with integral connector</li> <li>• Automotive-grade EMI/EMC testing, integrated reverse polarity, and short circuit protection</li> <li>• Industry-standard AMP termination, 32 mm mounting pitch, North American or European pinout styles, and compact package</li> <li>• Eight operating ranges up to 360°</li> </ul>
With lever 	Housed magnet 	

## **Warranty/Remedy**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

## **For more information**

To learn more about Honeywell's sensing and switching products, call 1.800.537.6945, visit [sensing.honeywell.com](http://sensing.honeywell.com), or e-mail inquiries to [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

## **Honeywell Sensing and Internet of Things**

9680 Old Bailes Road  
Fort Mill, SC 29707  
[www.honeywell.com](http://www.honeywell.com)

009097-1-EN | 1 | 12/16  
© 2016 Honeywell International Inc.

**Honeywell**