


CHG.	REMARKS	DATE
	CORRECTED VIEWS	3/9/64
A	WAS 700.2 - ADDED NOTE	3/9/64
B	WAS 700	4/1/64
C	ADDED FLANGE DESCRIPT.	4/16/64
D	ADDED 9K CAPACITY	6/25/64
E	ADDED 24K & 48K	8-13-67

C-2320-D

"NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION"
 Lebow Corporation claims proprietary rights to the material disclosed herein. This drawing and/or technical information is issued in confidence for the exclusive use of the user and may not be reproduced or used for any other purpose without the prior written consent of Lebow Corporation. This drawing and/or technical information is the property of Lebow Corporation and is loaned for mutual assistance, to be returned when its purpose has been served.

SCANNED
 SP 11/20/20

RECEPTACLE
 MS-3102 A-14S-5P

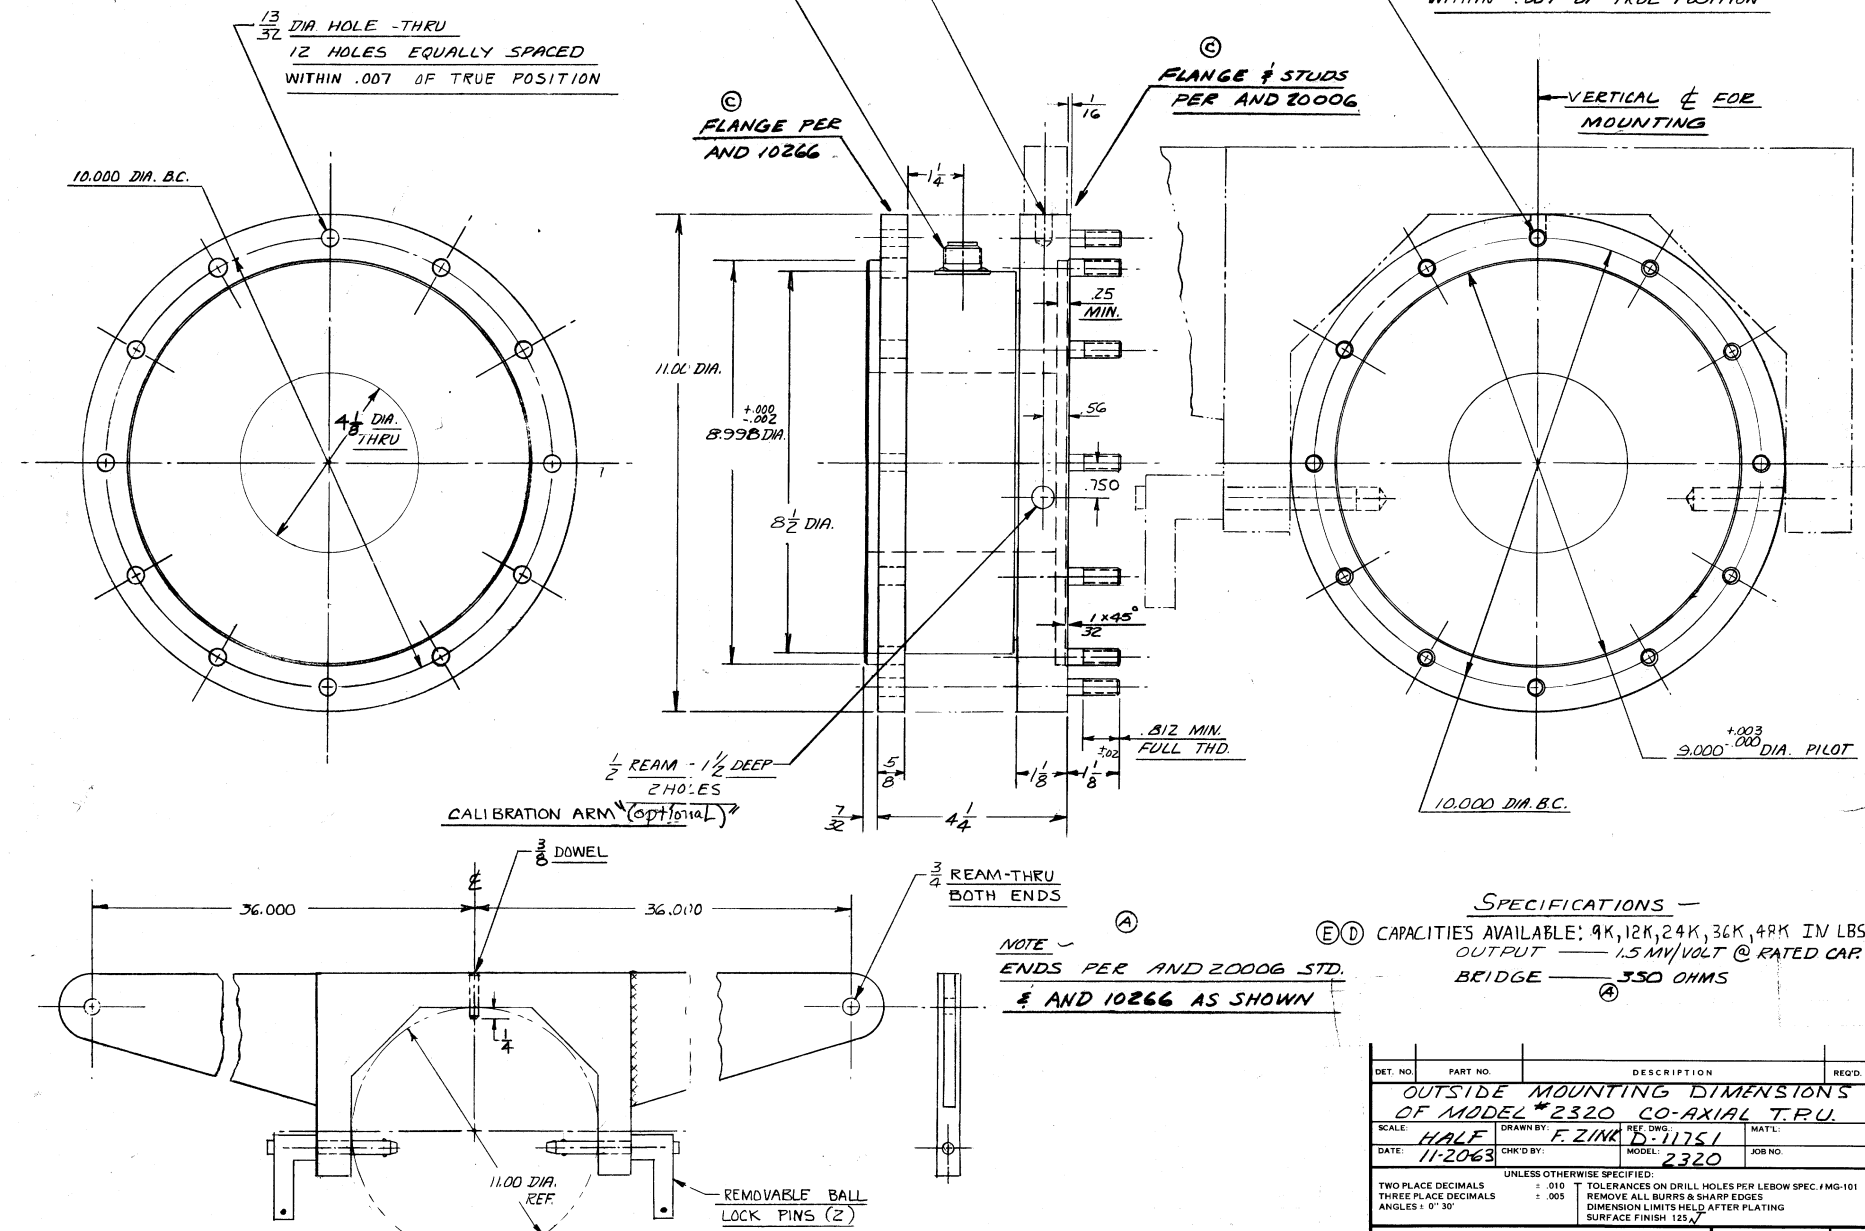

SPECIFICATIONS -

- (E) CAPACITIES AVAILABLE: 9K, 12K, 24K, 36K, 48K IN LBS
- OUTPUT 1.5 MV/VOLT @ RATED CAP.
- BRIDGE 350 OHMS

DET. NO.	PART NO.	DESCRIPTION	REQ'D.
OUTSIDE MOUNTING DIMENSIONS OF MODEL #2320 CO-AXIAL T.P.U.			
SCALE: HALF	DRAWN BY: F. ZINK	REF. DWG: 11751	MATL:
DATE: 11-20-63	CHK'D BY:	MODEL: 2320	JOB NO.
UNLESS OTHERWISE SPECIFIED:			
TWO PLACE DECIMALS = .010	TOLERANCES ON DRILL HOLES PER LEBOV SPEC. IMG-101		
THREE PLACE DECIMALS = .005	REMOVE ALL BURRS & SHARP EDGES		
ANGLES: 0°-30°	DIMENSION LIMITS HELD AFTER PLATING		
		SURFACE FINISH 125/7	

LEBOW ASSOCIATES, INC. TROY, MICHIGAN
 DRAWING NO. C-2320-D