


000-2591-00

12 HOLES, EQUALLY
SPACED ON 5.125" B.C.,
13/32" DIA HOLES

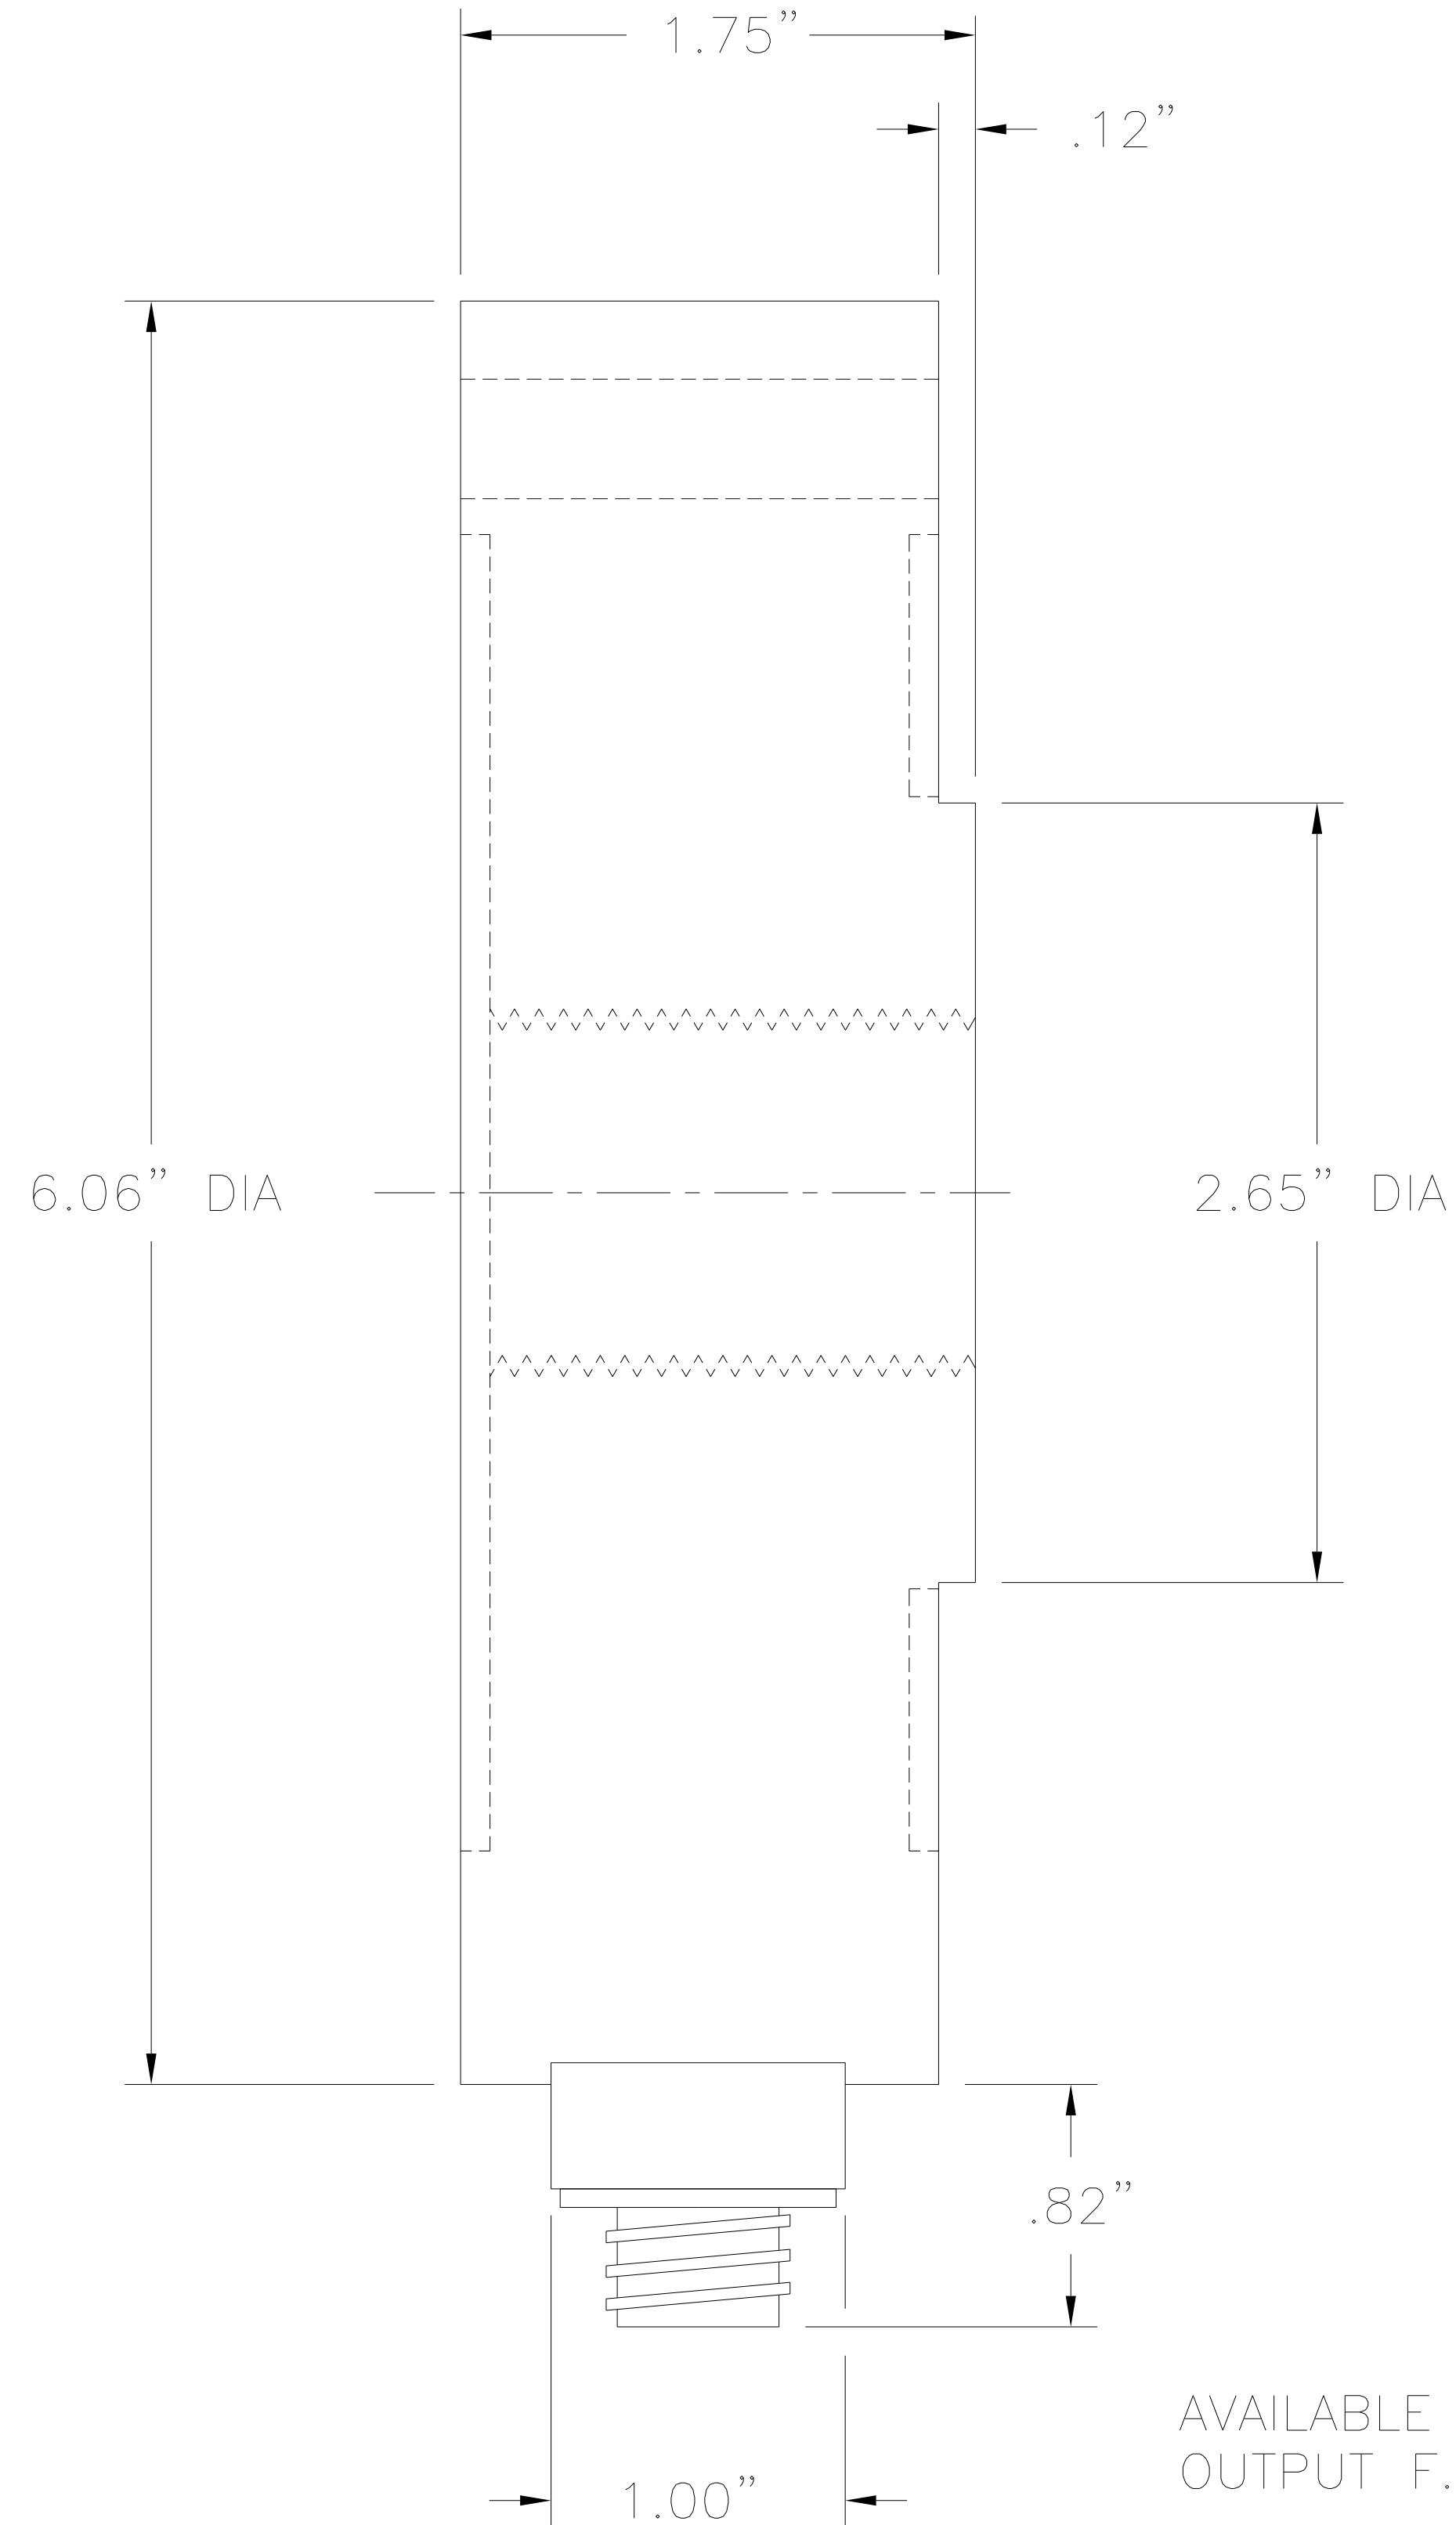


WIRING CODE
6 pin conn., no amp.

- A + EXCITATION
- B + OUTPUT
- C - OUTPUT
- D - EXCITATION
- E N/C
- F N/C

1 1/4-12 UNF -3B

ELECTRICAL CONNECTOR
BENDIX PC02A-10-6P
OR EQUIVALENT
MATING CONNECTOR:
BENDIX PC06W-10-6S

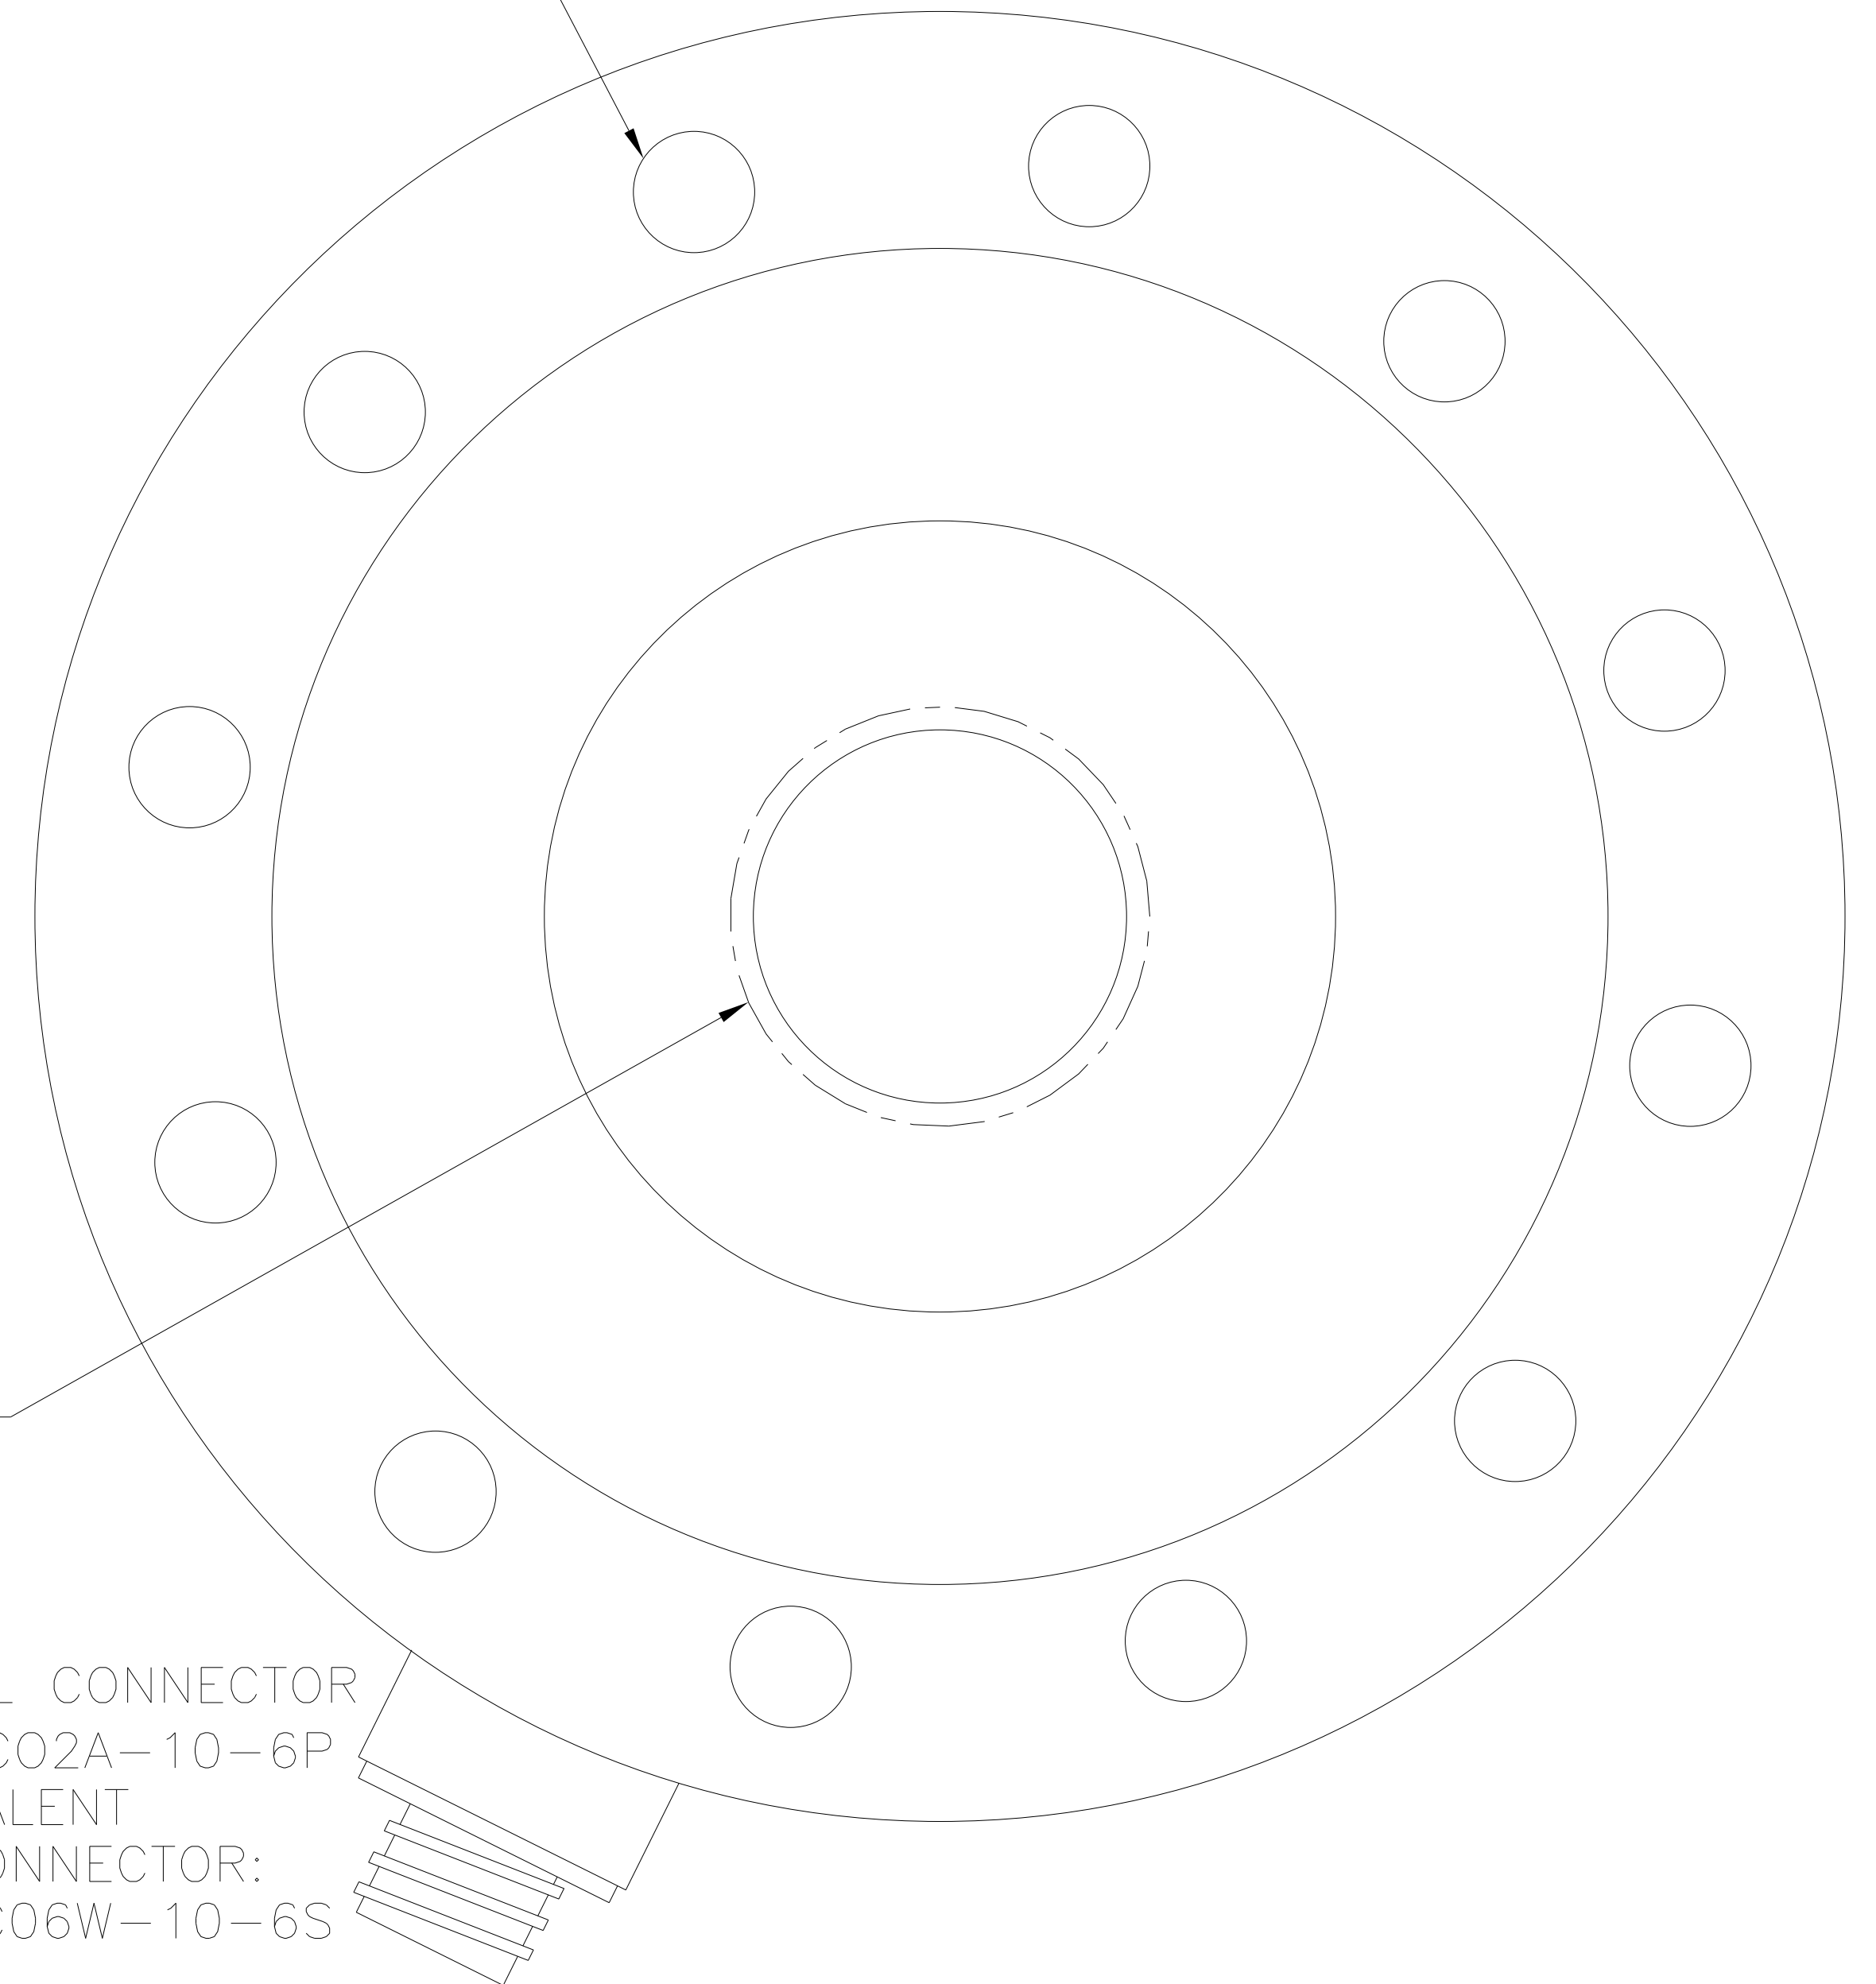

AVAILABLE CAPACITY: 10,000, 15,000 & 25,000 LBS.
 OUTPUT F.S.: 2 mv/v NOMINAL
 POSITIVE IN TENSION
 ZERO BAL: € 1 % F.S.
 LINEARITY: 0.05% F.S.
 HYSTERESIS: 0.05% F.S.
 SPAN T.C.: €0.15% F.S./100°F
 ZERO T.C.: €0.10% F.S./100°F
 BRIDGE RESISTANCE: 350 Ω
 EXCITATION: 10 VDC
 MATERIAL: 17-4 P.H.
 STAINLESS STEEL

| | | | |
|----------|-----------------------|----------------|-----------------|
| A | REVISED PER ECN #4051 | REV CAPACITIES | 2DEC92 |
| REV | DESCRIPTION | REVISED BY | APPROV. RELEASE |
| SCALE: | DRAWN | CHECKED: | APPROVED: |
| @ .6 : 1 | 19MAY92 JJB | | RJG 12/92 |

SENSOTEC INC.
1200 CHESAPEAKE AVE.
COLUMBUS, OHIO 43212

OUTLINE DRAWING for
MODEL 45

DOCUMENT NUMBER
000-2591-00

SHEET 1 OF 1